Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

PAM-0126

Preamplifier 20 MHz - 26 GHz

This preamplifier has a broad frequency range and high gain. This preamplifier compliments the 26GHz Antenna Kit. An ideal solution for improving system sensitivity.



Frequency Range: 20 MHz - 26.5 GHz

Gain (typical): 34 dB Gain (minimum): 26 dB Flatness: +/- 3.0 dB Noise Figure: 4.2 dB Output Power @ 1 dB compression + 6 dBm

VSWR (typical): Less than 1.7:1 Connector: N-Type, female

Physical Dimensions

Height: 2.5 in. (63 mm) Width: 3.75 in. (95 mm) Length: 6.25 in. (158 mm) Weight: 1.1 lb.'s (0.5 kg)

Features

- Broad Frequency Range of 20 MHz to 26.5 GHz
- · Low Noise, High Gain
- · Individually Calibrated
- Low VSWR

The PAM-0126 broadband preamplifier is an excellent choice for improving system dynamic range. The performance of this preamplifier will increase your system sensitivity by at least 29 dB and is ideal for low-amplitude test measurements. When measuring in the EMC lab or out in the field for general RFI testing, this preamplifier has a rugged compact design.

Recommended Accessories

- SAS-571 (Double Ridge Guide Horn Antenna)
- SAS-572 (High Gain Horn Antenna)
- SAC-26G-3 (3 Meter Low Loss Cable)
- SAC-26G-0.5 (0.5 Meter Low Loss Cable)

Information presented in this datasheet was current at the time of publication. A.H. Systems continual product improvement makes it necessary to reserve the right to change our mechanical and electrical specifications without notice.














Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

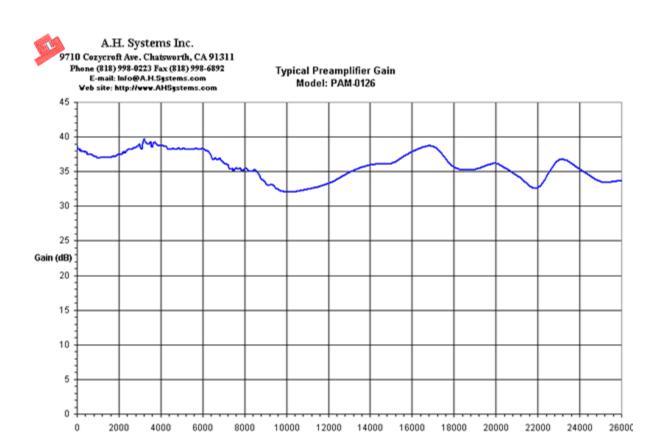

Frequency (MHz)

Information presented in this datasheet was current at the time of publication. A.H. Systems continual product improvement makes it necessary to reserve the right to change our mechanical and electrical specifications without notice.













