

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

SAS-512-4

Log Periodic Antenna 190 MHz – 4 GHz

This linear polarized broadband directional antenna excellent for both immunity and emissions testing.





Frequency Range: 190 MHz - 4000 MHz

Antenna Factor: 11 to 37 dB/m

Average Gain: 6.7dBi

Maximum Continuous Power: 1000 Watts

Max Radiated Field: 200 V/m
Pattern Type: directional

Impedance: 50 Ω

Connector: N-Type, female

Mounting Base: ¼ - 20 Thread, female

Features

- Frequency Range of 190 MHz to 4000 MHz
- Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The A.H. Systems' SAS-512-4 antenna is lightweight, compact and has been manufactured to ensure maximum gain, low VSWR and high power handling capabilities. Whether testing inside a shielded enclosure or outdoors, this antenna will display efficient performance characteristics through its frequency range.

Recommended Accessories

- ATU-514 (Antenna Tripod)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0204 (25 dB Preamplifier)
- LPM-510 (Log Periodic Tripod Mount)

















Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

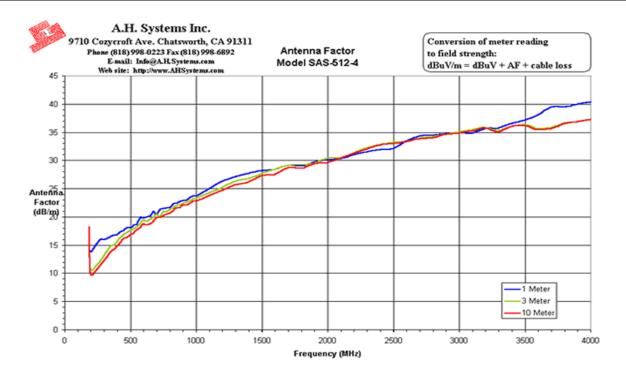

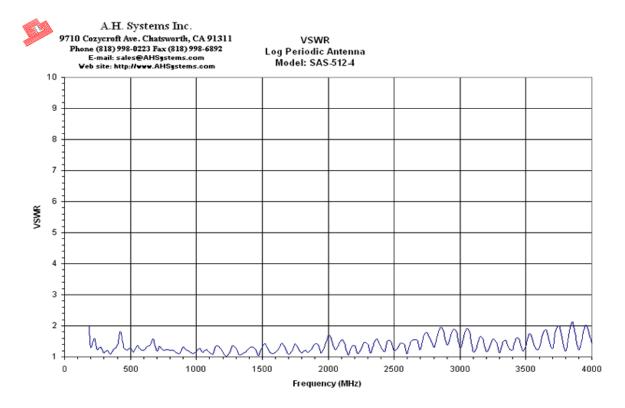












Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com

www.AHSystems.com

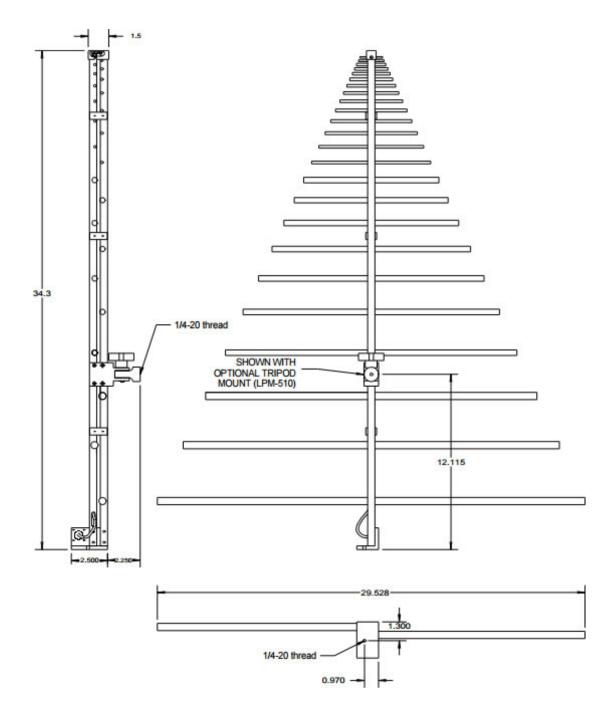

Physical Dimensions

 Length:
 34.3 in. (87.1 cm)

 Width:
 29.5 in. (74.9 cm)

 Weight:
 2.3 lb.'s (1.04 kg)

Information presented in this datasheet was current at the time of publication. A.H. Systems continual product improvement makes it necessary to reserve the right to change our electrical and mechanical specifications without notice.











