



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com

SAS-551

Passive Monopole Antenna

9 KHz – 40 MHz

Passive monopole for transmitting
Broadband electric field from 9 KHz - 40 MHz

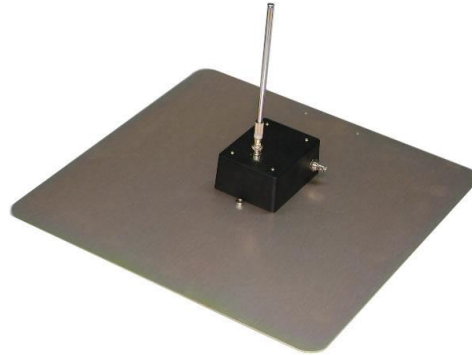

Frequency Range: 9 kHz - 40 MHz
Impedance: Calibrated for use into 50 Ω
Pattern Type: omni-directional
Connector: BNC-Type, female
Mounting Base: 1/4 - 20 Thread, female

Features

- Frequency Range of 9 KHz to 40 MHz
- Receive and Transmit
- Individually Calibrated (ANSI C63.5, IEEE-291 ECSM)
- Three Year Warranty

A.H. Systems' Passive Monopole Antenna provides superior performance in electric field measurements. The Passive Monopole Antenna is used for transmitting to perform shielding effectiveness and immunity testing.

Recommended Accessories

- P/N: 2236-24 24" x 24" (61 cm x 61 cm) Ground Plane

Physical Dimensions:

Ground Plane Dimensions: 18 in. X 18 in.

Rod Length: 8.5 in. - 43 in.

Weight: 3.5 lb.'s